

M Inox Series

M94 - M97 - M99

60Hz ~3600 1/min

Elettropompe autoadescanti “JET” (con eiettore incorporato)

Electric self priming pumps “JET” (with built-in ejector)

Electrobombas autocebantes “JET” (con eyector incorporado)



LIMITI DI FUNZIONAMENTO

Operating limits • Limites de empleo

Temperatura liquido pompato • Maximum temperature of pumped liquid • Temperatura del líquido bombeado: -15°C ÷ +50°C

Pressione massima di esercizio • Maximum working pressure • Presión máxima de funcionamiento: 6 bar

Temperatura massima ambiente • Maximum ambient temperature • Temperatura ambiente máxima: +40°C

CARATTERISTICHE IDRAULICHE


Hydraulic features • Características hidráulicas

Tipo Type	P ₂		Q		U.S.g.p.m.		0		2,6		5,3		7,9		10,6		13,2		14,5		15,9	
					m³/h		0		0,6		1,2		1,8		2,4		3		3,3		3,6	
					l/min		0		10		20		30		40		50		55		60	
M 94	0,37	0,5	H(m)	H(ft)	39	128	32	105	28	92	24	79	20	66	18	59						
M 97	0,55	0,75			45	148	42	138	36	118	31	102	27	89	23	75	21	69				
M 99	0,75	1			48	157	44	144	39	128	35	115	31	102	28	92	27	89	25	82		

Tolleranze secondo UNI EN ISO 9906:2012–Grado 3B. • Tolerance according to UNI EN ISO 9906:2012–Grade 3B. • Tolerancia de acuerdo con UNI EN ISO 9906:2012–Clase 3B.

DIMENSIONI – VERSIONI STANDARD

Dimensions – standard versions • Dimensiones – versiones estándar

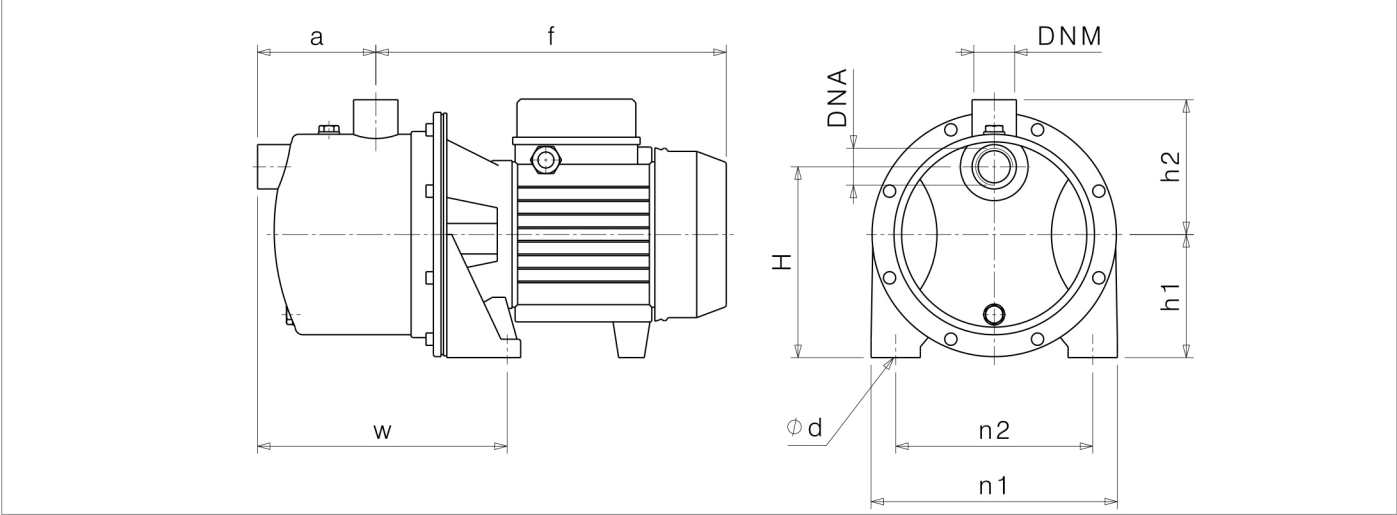

Tipo Type	P ₂		Motore Motor			DNA ¹	DNM ¹	f	a	n1	n2	H	h1	h2	Ød	w
			MEC	~	3~ η											
M 94	0,37	0,5	71	1~3~	IE1-IE2	1" G	1" G	295	98	200	160	155	100	106	10	209
M 97	0,55	0,75	71	1~3~	IE1-IE2	1" G	1" G	295	98	200	160	155	100	106	10	209
M 99	0,75	1	71	1~3~	IE1	1" G	1" G	295	98	200	160	155	100	106	10	209
M 99	0,75	1	71	3~	IE2-IE3	1" G	1" G	315	98	200	160	155	100	106	10	209

Disegni dimensionali, pesi e immagini sono unicamente indicativi e non vincolanti • Dimensional drawing, weight and picture are indicative only and not binding • Dimensiones, pesos y fotografías son indicativos y no vinculantes

¹ Versione con filettatura NPT fornibile a richiesta • Version with NPT thread available on request • Versión con rosca NPT disponible bajo pedido