DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer

Product line : Rolled Steel NEMA Premium Efficiency

Three-Phase

Product code: 12630272

Catalog #:

01018OT3E215T-S

Frame : 213/5T

Output : 10 HP (7.5 kW) Poles Frequency Rated voltage Rated current L. R. Amperes **LRC**

: 60 Hz : 230/460 V : 24.8/12.4 A : 174/86.8 A : 7.0x(Code H) : 12.0/5.99 A

No load current Rated speed : 1770 rpm Slip : 1.67 % Rated torque : 29.7 ft.lb Locked rotor torque : 250 % Breakdown torque : 350 % Insulation class : F Service factor : 1.15

Moment of inertia (J) : 1.30 sq.ft.lb Design : B

Locked rotor time

: 25s (cold) 14s (hot) Temperature rise : 80 K Duty cycle : Cont.(S1)

Ambient temperature Altitude Cooling method

: -20°C to +40°C : 1000 m.a.s.l. : IC01 - ODP

Mounting : F-1 : Both (CW and CCW) Rotation¹ Noise level² : 59.0 dB(A)

Starting method : Direct On Line Approx. weight³ : 121 lb

50% 75% 100% Foundation loads Output

91.7 : 544 lb Efficiency (%) 90.2 91.0 Max. traction Power Factor 0.77 : 665 lb 0.64 0.83 Max. compression

Non drive end Drive end 6208 ZZ Bearing type 6206 ZZ Sealing Without Bearing Seal Without Bearing Seal

Lubrication interval Lubricant amount

Lubricant type Mobil Polyrex EM

Notes

USABLE @208V 27.4A SF 1.00 SFA 27.4A


This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.

(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	06/11/2023			1/1	

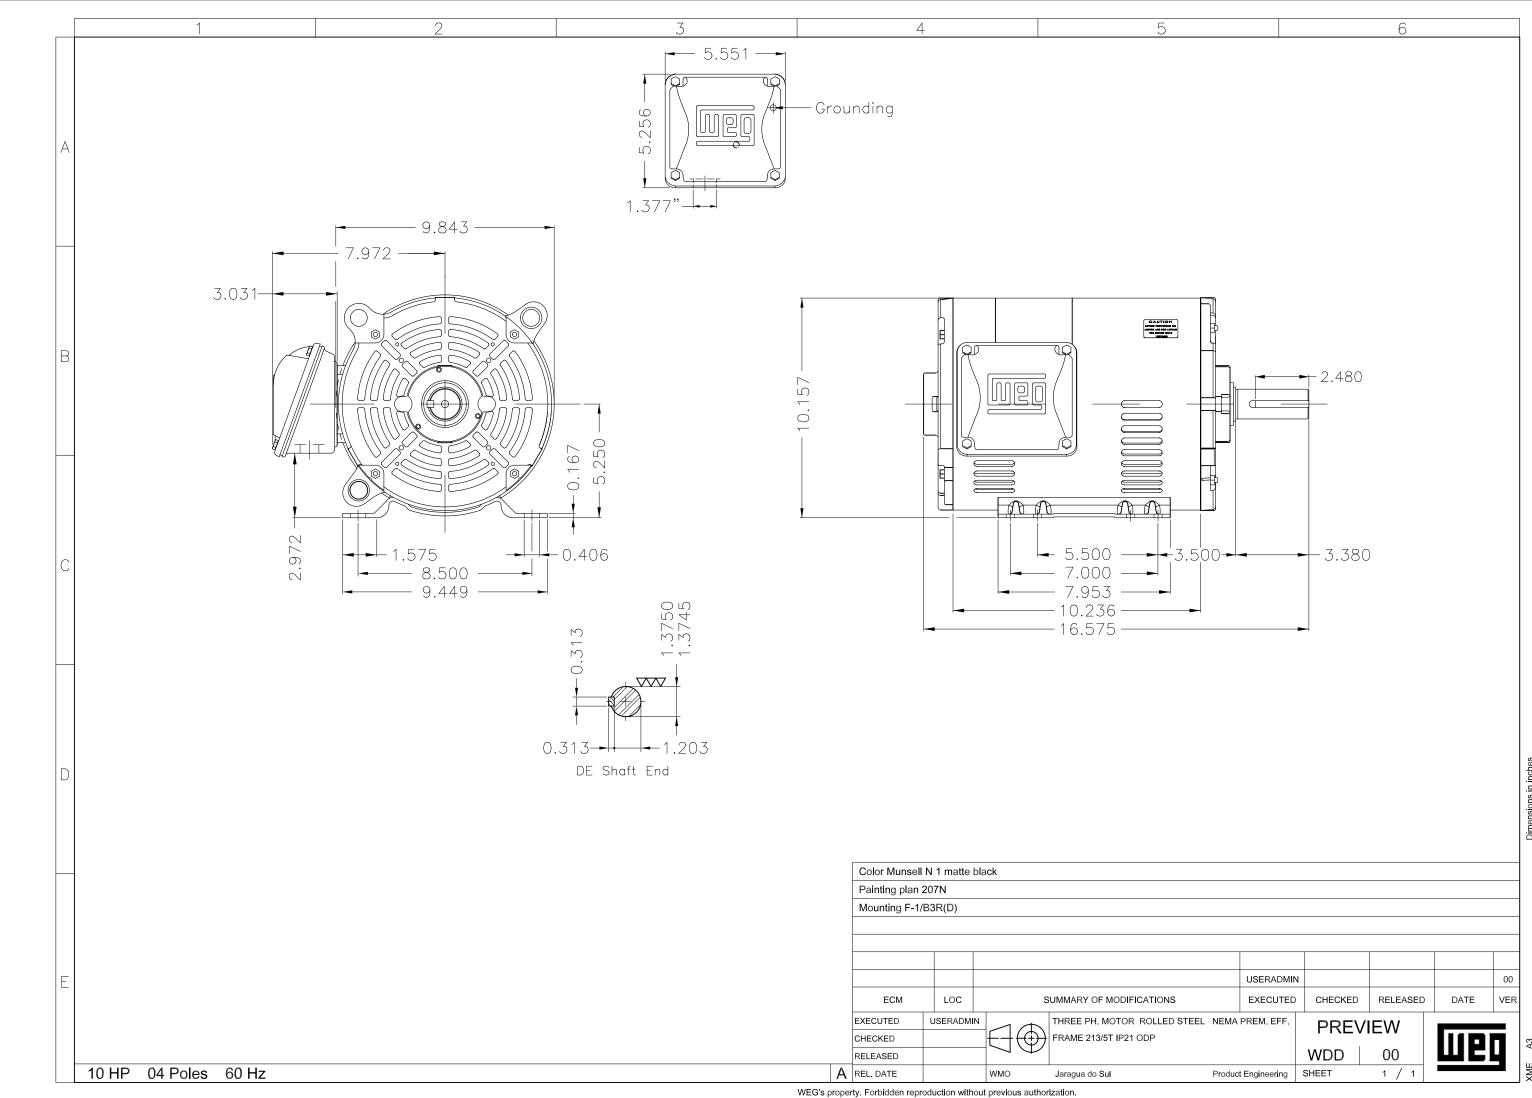



CC029A





MAT: 12630272

W01.TO0IC0X0N MODEL 01018OT3E215T-S

08N	OV2023	S/N:			
PH	3	Hz 60			
FR	213/5T				

213/5T

DUTY CONT ALT 1000 m.a.s.l

INS CL F AT 80K AMB DES 40°C B

ENCL ODP CODE H

29 R-26 4/14 9-14 0A

ALTERNATE RATING:

DE 6208-ZZ

ODE 6206-ZZ

RPM 1770 NEMA NOM FEE 10HP

HP 10 ĿW 7.5

v 230/460

Δ

SFA 28.5/14.3

SE 1 15

ΡF 0.83

91.7% 50Hz 190-220/380-415V 1480RPM

Inverter duty motor For 80Hz use on VPWM 1000:1 VT. 5:1 CT

24.8/12.4

EFF 88.1% MOBIL POLYREX EM

T1-BLU T2-WHT T3-ORG T4-YEL T5-RLK T6-GRY T7-PNK

(IE1)

T8-RED

SF1.15

IEC 60034-1

T9-RED BRK

INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION WARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit AVERTISSEMENT: La motaur doit âtre mis à la terre



conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.