

# DATASHEET

## Variable Speed Drives



### Main Features

|                   |                        |
|-------------------|------------------------|
| Reference         | : CFW900A04P6T2DB20Y2B |
| Product code      | : 14326157             |
| Product reference | : CFW900               |

### Basic data

|                               |                   |
|-------------------------------|-------------------|
| Rated voltage                 | : 200 up to 240 V |
| Input minimum-maximum voltage | : 170-264 V       |
| Number of phases:             |                   |
| - Input                       | : 3               |
| - Output                      | : 3               |

| Supply voltage range         | 200-240V         |                 |
|------------------------------|------------------|-----------------|
| Overload specification       | Normal Duty (ND) | Heavy Duty (HD) |
| Rated output current         | 4.6 A            | 4.6 A           |
| Overload output current 60 s | 5.06 A           | 6.9 A           |
| Overload output current 3 s  | 6.9 A            | 9.2 A           |

### Maximum applicable motor

| Voltage / Frequency | Rated power (HP / kW) [1]     |                              |
|---------------------|-------------------------------|------------------------------|
|                     | Normal Duty (ND) overload [1] | Heavy Duty (HD) overload [1] |
| 220V / 60Hz         | 1.5 / 1.1                     | 1.5 / 1.1                    |
| 230V / 50Hz         | 1.5 / 1.1                     | 1.5 / 1.1                    |
| 230V / 60Hz         | 1.5 / 1.1                     | 1.5 / 1.1                    |

|                           |                                           |
|---------------------------|-------------------------------------------|
| Dynamic braking [2]       | : Yes                                     |
| EMC filter                | : Yes, emissions and immunity category C3 |
| Conducted issue           | : Categories C2 and C3                    |
| Link Inductor             | : Yes                                     |
| Disconnect switch         | : Not applicable                          |
| Safety function           | : STO/SS1                                 |
| Electronic external power | : Yes (24 Vdc $\pm$ 10%)                  |
| Hardware                  | : Standard                                |

### VSD power specifications

|                                          |                                                   |
|------------------------------------------|---------------------------------------------------|
| Line frequency                           | : 50/60 Hz                                        |
| Line frequency range (minimum - maximum) | : 48-63 Hz                                        |
| Phase unbalance                          | : Less or equal to 3% of input rated line voltage |
| Transient voltage and overvoltage        | : Category III                                    |

### Three-phase input rated current:

|                                                         |              |
|---------------------------------------------------------|--------------|
| - Three-phase input current ND                          | : 4.6 A      |
| - Three-phase input current HD                          | : 4.6 A      |
| Typical input power factor                              | : 0.93       |
| Displacement factor                                     | : > 0.98     |
| Rated efficiency                                        | : $\geq$ 96% |
| Efficiency class                                        | : IE2        |
| Maximum connections (power up cycles - on/off) per hour | : 60         |

Direct current power supply : Allow, specified input DC voltage range: 229 up to 400 Vdc

### Standard switching frequency:

|                                |                               |
|--------------------------------|-------------------------------|
| - Rated switching frequency ND | : 4 kHz                       |
| - Rated switching frequency HD | : 4 kHz                       |
| Selectable switching frequency | : 1 to 16 kHz                 |
| Memory card                    | : MicroSD (card not included) |
| Real-time clock                | : Yes, on the control board   |
| Copy Function                  | : Yes, by microSD card or WPS |

### Dissipated power

| Inverter part                  | 200-240V         |                 |
|--------------------------------|------------------|-----------------|
|                                | Normal Duty (ND) | Heavy Duty (HD) |
| Complete inverter              | 70 W             | 70 W            |
| Front part of the inverter [3] | 30 W             | 30 W            |

# DATASHEET

## Variable Speed Drives



### VSD control specifications

#### Motor control / performance data

##### Control types:

|                                    |                                                      |
|------------------------------------|------------------------------------------------------|
| - Control method - induction motor | : Scalar, VVW, Vector with and without encoder       |
| - Control type - PM motor          | : VVW                                                |
| Control output frequency [5]       | : 0-500 Hz                                           |
| Frequency resolution               | : Equivalent to 1 rpm                                |
| Encoder interface                  | : Yes (input A/B, 24V, 32kHz)                        |
| Encoder accessory                  | : CFW900-ENC-01: ABZ, 5-30 V, 310 kHz (not included) |

#### Induction motor

##### Scalar control:

|                    |                     |
|--------------------|---------------------|
| - Speed regulation | : 1% of rated speed |
| - Speed variation  | : 1:20              |

##### VVW control:

|                    |                     |
|--------------------|---------------------|
| - Speed regulation | : 1% of rated speed |
| - Speed variation  | : 1:30              |

##### Sensorless vector control:

|                    |                       |
|--------------------|-----------------------|
| - Speed regulation | : 0,5% of rated speed |
| - Speed variation  | : 1:100               |

##### Vector control with encoder:

|                    |                        |
|--------------------|------------------------|
| - Speed regulation | : 0,05% of rated speed |
| - Speed variation  | : Up to 0 rpm          |

#### Permanent magnet motor

##### VVW control:

|                    |                        |
|--------------------|------------------------|
| - Speed regulation | : 0.05% of rated speed |
| - Speed variation  | : 1:10                 |

#### General control specification

##### Power supply available to the user:

|                        |                                                          |
|------------------------|----------------------------------------------------------|
| - Output voltage       | : 24 Vdc $\pm$ 10%                                       |
| - Maximum capacity [4] | : 0,75 A                                                 |
| Backplane              | : CFW900-4SLOTS (Total slots for function expansion: 4). |

##### Control modules assembled on the VSD:

|          |                 |
|----------|-----------------|
| - Slot A | : CFW900-REL-01 |
| - Slot X | : CFW900-IOS    |

#### Inputs and outputs

##### Analog inputs [CFW900-IOS (Slot X) - included]

|                     |                             |
|---------------------|-----------------------------|
| Quantity (standard) | : 2                         |
| Levels              | : -10/0 to 10V; 0/4 to 20mA |

##### Impedance:

|                               |                  |
|-------------------------------|------------------|
| - Impedance for voltage input | : 400 k $\Omega$ |
| - Impedance for current input | : 250 $\Omega$   |
| Function                      | : Programmable   |
| Maximum allowed voltage       | : $\pm$ 30 Vcc   |

##### Digital inputs [CFW900-IOS (Slot X) - included]

|                         |                                        |
|-------------------------|----------------------------------------|
| Quantity (standard)     | : 6                                    |
| Type                    | : Configurable, NPN or PNP             |
| Maximum low level       | : 5 V (DI1 to DI6)                     |
| Minimum high level      | : 11 V (DI1 to DI4) and 15 V (DI5/DI6) |
| Input current           | : 11 mA                                |
| Maximum input current   | : 13 mA                                |
| Maximum frequency       | : 32 kHz (DI5/6) - Not avail. V1.xx    |
| Function                | : Programmable                         |
| Maximum allowed voltage | : 30 Vcc                               |

# DATASHEET

## Variable Speed Drives



### Saídas analógicas [CFW900-IOS (Slot X) - included]

|                       |                                     |
|-----------------------|-------------------------------------|
| Quantity (standard)   | : 2                                 |
| Levels                | : 0 to 10V, 0 to 20mA and 4 to 20mA |
| RL for voltage output | : 10 kΩ                             |
| RL for current output | : 600 Ω                             |
| Function              | : Programmable                      |

### Relay digital outputs [CFW900-IOS (Slot X) - included]

|                           |                                     |
|---------------------------|-------------------------------------|
| Transistor digital output | : 2 (NPN)                           |
| Maximum voltage           | : 24 Vdc                            |
| Maximum current           | : 40 mA                             |
| Maximum frequency         | : 32 kHz (Not avail. version V1.xx) |
| Function                  | : Programmable                      |

### Relay outputs [accessory CFW900-REL-01 (included)]

|                        |                              |
|------------------------|------------------------------|
| Quantity (standard)    | : 2 relays NO; 1 relay NO/NC |
| Maximum output voltage | : 250 Vac / 30 Vdc, OVC III  |
| Maximum current        | : 2 A                        |
| Function               | : Programmable               |

### Functional safety

Safety functions:

- Safe torque off (STO) according to IEC 61800-5-2 - Stop category 0 according to IEC 60204-1
- Safe stop 1 time controlled (SS1-t), according to IEC 61800-5-2 - Stop category 1 according to IEC 60204-1

Safety category:

- SIL 3, according to IEC 61508 / IEC 62061 / IEC 61800-5-2
- PLe, category 4, according to EN ISO 13849-1

Number of inputs: 2

### Communication

|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Bluetooth interface | : Yes, included in HMI                                 |
| USB port            | : Yes, available in HMI                                |
| RS-485 port         | : Yes, included                                        |
| RS-485 protocol     | : Modbus RTU                                           |
| Dual Ethernet port  | : Yes, included                                        |
| Ethernet protocol 1 | : Modbus TCP                                           |
| Ethernet protocol 2 | : Direct cloud connection (MQTT) - Embedded drive scan |
| CAN port            | : Yes, with CFW900-CCAN-W accessory (not included)     |
| CAN Protocol 1      | : CANOpen                                              |
| CAN Protocol 2      | : DeviceNet                                            |

### Available protections/faults

- Overcurrent/short circuit in the output
- Phase loss
- Under/Overvoltage on the DC link
- Overtemperature
- Motor overload
- Overload in the power module (IGBTs)
- External alarm/fault
- Braking resistor overload
- CPU or memory fault
- Phase-ground short circuit in the output

### Keypad (HMI)

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Availability                      | : Included in the product                                      |
| HMI installation                  | : Local (on the inverter) or remote (via cable - not included) |
| Number of HMI buttons             | : 12                                                           |
| Display                           | : Graphic LCD                                                  |
| Indication accuracy               | : 5% of rated current                                          |
| Speed resolution                  | : 1 rpm                                                        |
| Standard HMI degree of protection | : IP65 (IEC) / UL Type 12 (UL)                                 |
| Remote HMI frame                  | : Accessory                                                    |
| Remote HMI degree of protection   | : IP65 (IEC) / UL Type 12 (UL)                                 |

### Ambient conditions

Degree of protection of VSD enclosure:

|                        |                                |
|------------------------|--------------------------------|
| - Front                | : IP20 (IEC) / Open-Type (UL)  |
| - Front with accessory | : IP21 (IEC) / UL Type 1 (UL)  |
| - Rear                 | : IP55 (IEC) / UL Type 12 (UL) |
| Pollution degree       | : 2 (EN50178 and UL508C)       |

# DATASHEET

## Variable Speed Drives



### Temperature:

|                        |                  |
|------------------------|------------------|
| - Minimum              | : -10 °C / 14 °F |
| - Maximum (front side) | : 60 °C          |
| - Maximum (back)       | : 50 °C          |

### Current derating:

- Switching frequency of 2 kHz: 2%/°C from 50°C (1.1%/°F from 122°F) on the rear part.
- Switching frequency  $\geq$  4 kHz: 1%/°C from 40 to 50°C (0.56%/°F from 104 to 122°F) on the back and 2%/°C from 50°C (1.1%/°F from 122°F) on the rear part.

### Relative humidity (non-condensing)

|           |       |
|-----------|-------|
| - Minimum | : 5%  |
| - Maximum | : 90% |

### Altitude

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| - Rated conditions                                     | : 1000 m (3281 ft)  |
| - Maximum allowed for operation (with derating factor) | : 4000 m (13123 ft) |

### Current and voltage deratings as a function of altitude:

|                                                                  |                                                           |
|------------------------------------------------------------------|-----------------------------------------------------------|
| - Current derating factor (for altitudes above rated)            | : 1% for each 100 m above (0,3% for each 100 ft above)    |
| - Voltage derating factor (for altitudes above 2000 m / 6562 ft) | : 1,1% for each 100 m above (0,33% for each 100 ft above) |

### Sustainability Directives

|                   |                            |
|-------------------|----------------------------|
| RoHS              | : Yes                      |
| Conformal Coating | : 3C2 (IEC 60721-3-3:2002) |

### Frame size, dimensions and weight

|        |                      |
|--------|----------------------|
| Size   | : A                  |
| Height | : 269.3 mm / 10.6 in |
| Width  | : 145 mm / 5.71 in   |
| Depth  | : 221.8 mm / 8.73 in |
| Weight | : 4.5 kg / 9,92 lb   |

### Mechanical installation

|                                         |                                  |
|-----------------------------------------|----------------------------------|
| Mounting position                       | : Surface or flange              |
| Fixing screw                            | : M5                             |
| Tightening torque                       | : 5 N.m / 3.69 lb.ft             |
| Allows side-by-side assembly            | : Yes, IP20 degree of protection |
| - Top                                   | : 25 mm / 0.98 in                |
| - Bottom                                | : 25 mm / 0.98 in                |
| - Front                                 | : 10 mm / 0.39 in                |
| - Between inverters (IP20)              | : 0 mm / 0 in                    |
| - Between inverters (IP21 or UL Type 1) | : 30 mm / 1.18 in                |
| Allows horizontal mounting              | : Yes                            |

### Electrical connections

|                        | Recommended cable gauge @ 75 °C (167 °F)                                              | Recommended tightening torque |
|------------------------|---------------------------------------------------------------------------------------|-------------------------------|
| Power supply and motor | 2.5 mm <sup>2</sup> (14 AWG)                                                          | 1.2 N.m / 0.89 lb.ft          |
| Braking                | 2.5 mm <sup>2</sup> (14 AWG)                                                          | 1.2 N.m / 0.89 lb.ft          |
| Grounding              | 2.5 mm <sup>2</sup> (14 AWG)                                                          | 1.2 N.m / 0.89 lb.ft          |
| Control                | XC1/XC2: 0.2-1.5mm <sup>2</sup> (24-16AWG)<br>XC30: 0.2-2.5mm <sup>2</sup> (24-12AWG) | Spring push-in connection     |

### Additional specifications

|                                           |                    |
|-------------------------------------------|--------------------|
| Maximum breaking current                  | : 10.0 A           |
| Minimum resistance for the brake resistor | : 43 $\Omega$      |
| Recommended aR fuse [6]                   | : FNH000-20K-A     |
| Recommended aR fuse [6]                   | : Not applicable   |
| Recommended circuit breaker [6]           | : ACW100H-FMU40-3  |
| Recommended circuit breaker [6]           | : UBW225H-FTU40-3A |
| HMI battery type                          | : CR2032           |
| HMI battery life expectancy               | : 10 years         |

### Power loss data according to Ecodesign Directive 2019/1781 (IEC 61800-9 standard)

|                                       |           |
|---------------------------------------|-----------|
| Rated supply voltage                  | : 230 V   |
| Rated output current                  | : 4.6 A   |
| Motor power                           | : 1.1 kW  |
| Switching frequency                   | : 4 kHz   |
| Aparent power of the inverter (Sr,eq) | : 1.8 kVA |

# DATASHEET

## Variable Speed Drives



VSD (CDM) power losses at the following operating points (speed, torque) [7]:

|            | Torque: 25% | Torque: 50% | Torque: 100% |
|------------|-------------|-------------|--------------|
| Speed: 0%  | 2.4%        | 2.6%        | 3.0%         |
| Speed: 50% | 2.4%        | 2.7%        | 3.3%         |
| Speed: 90% |             | 2.9%        | 3.9%         |

Standby power losses: 24 W / 1.3%

Efficiency class : IE2

### Standards

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety standards                              | <ul style="list-style-type: none"> <li>- UL61800-5-1 - Adjustable Speed Electric Power Drive Systems - Part 5-1: Safety Requirements - Electrical, Thermal and Energy</li> <li>- EN 61800-5-1 - Safety requirements electrical, thermal and energy</li> <li>- EN 50178 - Electronic equipment for use in power installations</li> <li>- EN 60146 (IEC 146) - Semiconductor converters</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Specifications standard                       | <ul style="list-style-type: none"> <li>- EN 61800-2 - Adjustable speed electrical power drive systems - Part 2: General requirements - Rating specifications for low voltage adjustable frequency AC power drive systems</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Electromagnetic Compatibility (EMC) standards | <ul style="list-style-type: none"> <li>- EN 61800-3 - Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test methods</li> <li>- EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment</li> <li>- CISPR 11 - Industrial, scientific and medical (ISM) radio-frequency equipment - Electromagnetic disturbance characteristics - Limits and methods of measurement</li> <li>- EN 61000-4-2 - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test</li> <li>- EN 61000-4-3 - Electromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test</li> <li>- EN 61000-4-4 - Electromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 4: Electrical fast transient/ burst immunity test</li> <li>- EN 61000-4-5 - Electromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 5: Surge immunity test</li> <li>- EN 61000-4-6 - Electromagnetic compatibility (EMC) - Part4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields</li> <li>- EN 61000-4-11 - Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests</li> </ul> |
| Mechanical construction standards             | <ul style="list-style-type: none"> <li>- EN 60529 - Degrees of protection provided by enclosures (IP code)</li> <li>- UL 50 - Enclosures for electrical equipment</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Ecodesign standards                           | <ul style="list-style-type: none"> <li>- IEC 61800-9 Parts 1&amp;2 - Adjustable speed electrical power drive systems - Ecodesign for power drive systems, motor starters, power electronics and their driven applications</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Functional safety standards                   | <ul style="list-style-type: none"> <li>- EN 61800-5-2 - Adjustable speed electrical power drive systems - Part 5-2: Safety requirements - Functional</li> <li>- EN ISO 13849-1 - Safety of machinery - Safety-related parts of control systems - Part 1: General principles for design</li> <li>- EN 62061 - Safety of machinery - Functional safety of safety-related control systems</li> <li>- IEC 61508 Parts 1-7 - Functional safety of electrical/electronic/ programmable electronic safety-related systems</li> <li>- EN 60204-1 - Safety of machinery - Electrical equipment of machines - Part 1: General requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

### Certifications

Product certification : UL, CE, RCM, EAC, UKCA, TÜV Rheinland-FS and UL-NOM

### Notes

- 1) Orientative motor power, valid for WEG Motors standard of IV poles. The correct sizing must be done according to the rated current of the used motor, which must be equal or lower than the rated output current of the VSD.
- 2) Braking resistor is not included.
- 3) When VSD is flange mounted, that power losses data refer to the power losses of the front part of the VSD that is inside the cabinet (the rest of the VSD losses are outside the cabinet).
- 4) That power supply is also used to feed the control modules (accessories). Information on correct sizing is provided in CFW900 User's Manual.

# DATASHEET

## Variable Speed Drives



- 5) Typical maximum value considering the switching frequency settings as per factory default (it is possible to increase the maximum output frequency that can be generated by the VSD by increasing the switching frequency). Maximum possible value: switching frequency / 10.
- 6) There are variations to meet UL and CE standards. For further information refer to CFW900 User's Manual.
- 7) VSD power losses in relation to its rated apparent power ( $S_{r,eq}$ ).
- 8) All images are merely illustrative.
- 9) For further information refer to CFW900 User's Manual.










A

B

C

D

E

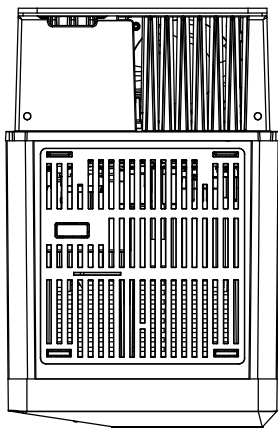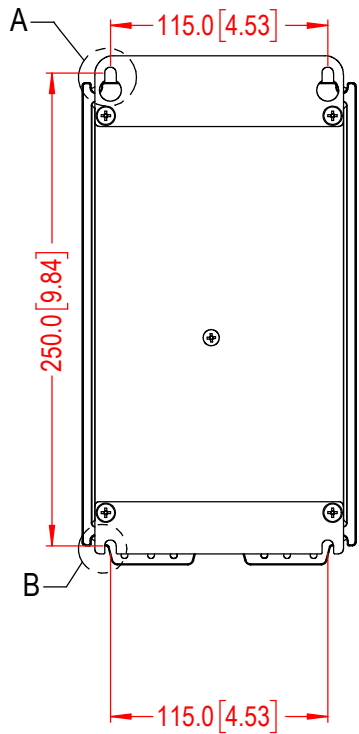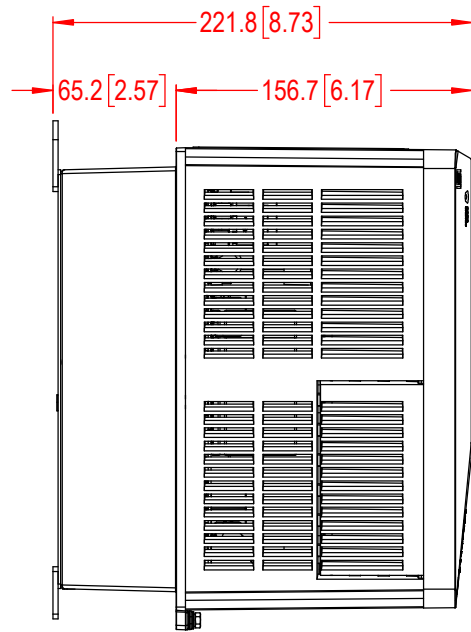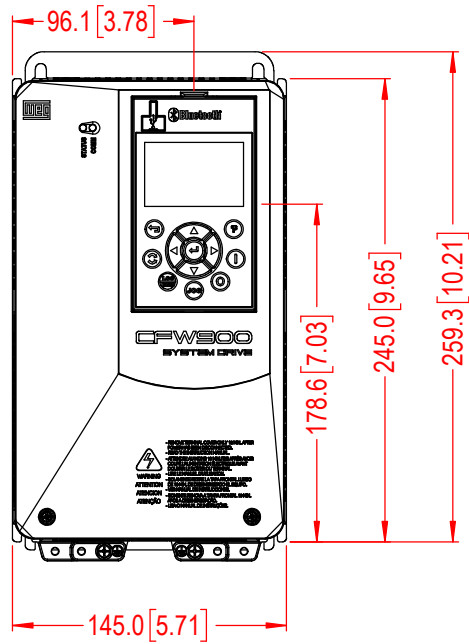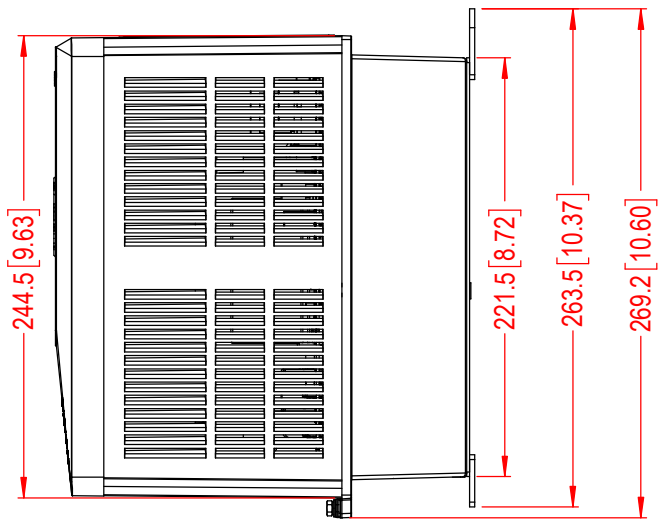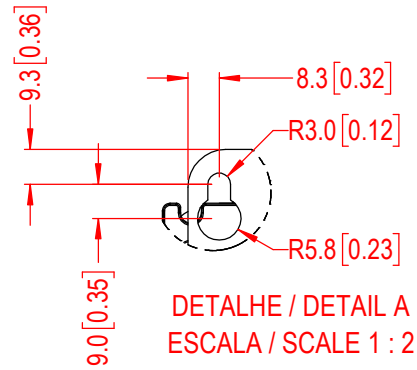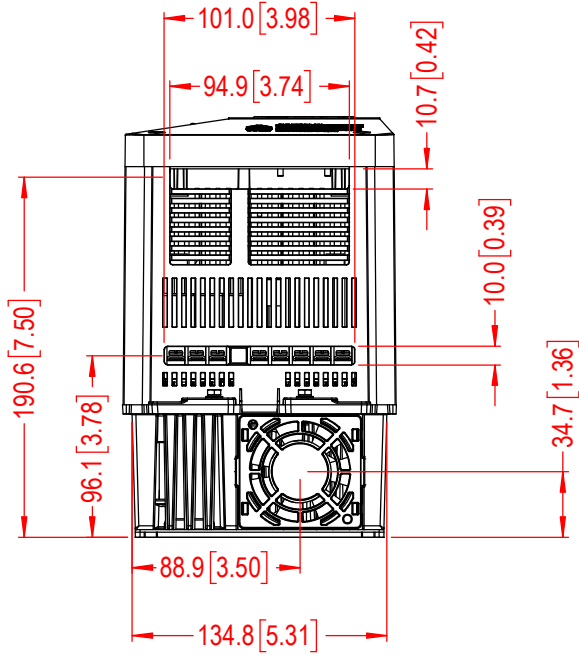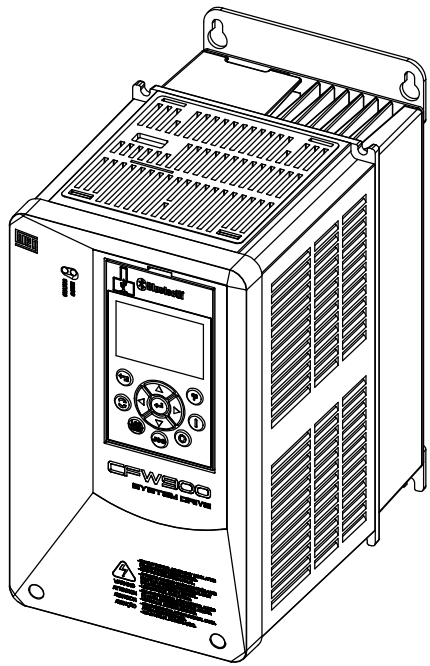

|                          |  |     |  |                                                                                       |  |                |  |                       |  |                       |  |                      |  |              |  |                                                                                       |  |
|--------------------------|--|-----|--|---------------------------------------------------------------------------------------|--|----------------|--|-----------------------|--|-----------------------|--|----------------------|--|--------------|--|---------------------------------------------------------------------------------------|--|
| MASSA BRUTA/GROSS WEIGHT |  | kg  |  | MASSA LÍQUIDA/NET WEIGHT                                                              |  | kg             |  | ESCALA/SCALE          |  | 1:4                   |  |                      |  |              |  |                                                                                       |  |
|                          |  |     |  |                                                                                       |  |                |  |                       |  |                       |  |                      |  |              |  |                                                                                       |  |
|                          |  |     |  |                                                                                       |  |                |  |                       |  |                       |  |                      |  |              |  |                                                                                       |  |
| ECM                      |  | LOC |  | RESUMO DE MODIFICAÇÕES<br>SUMMARY OF MODIFICATIONS                                    |  |                |  | EXECUTADO<br>EXECUTED |  | VERIFICADO<br>CHECKED |  | LIBERADO<br>RELEASED |  | DATA<br>DATE |  | VER                                                                                   |  |
| EXEC                     |  |     |  |  |  | CFW900         |  |                       |  |                       |  | 45016237             |  |              |  |  |  |
| VERIF/CHECKED            |  |     |  |                                                                                       |  | MEC A / SIZE A |  |                       |  |                       |  |                      |  |              |  |                                                                                       |  |
| LIBER/RELEASED           |  |     |  |                                                                                       |  | IP20           |  |                       |  |                       |  | 00                   |  |              |  |                                                                                       |  |
| DT LIBER/REL DT          |  |     |  |                                                                                       |  |                |  |                       |  |                       |  | FOL/SHEET 1 / 1      |  |              |  |                                                                                       |  |